

INSTALLATION INSTRUCTION FOR 4324-577

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

READ AND SAVE THESE INSTRUCTIONS

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Secure the part (II) of the decorative arms (J) to the coupling (L) with the screws (K), then secure the part (I) of the decorative arms (J) to the L shape iron (H) with the screws (I).
4. Secure hanging bracket (A) to the junction box with the junction box screws (B) (Size:#8-32*0.6"L) through slotted holes in hanging bracket (A). The side of the hanging bracket marked "GND" must face out.

HANGING THE FIXTURE (Fig.1)

5. Using proper chain pliers open one link of chains (F) and connect it to the fixture loops (G).
6. By measuring, determine connect number of links needed for desired hanging height.
7. Open one link of the other end of the chains (F) and connect it to the ceiling loops (E).
8. Lace the fixture wires through the chain links (F) and ceiling loop (E) and pull until taut.



CONNECTING THE WIRES (Fig. 2)

9. At this point, connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper) connect fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided. After the wires are connected, tuck them carefully inside the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

10. Raise the canopy (D) to hanging bracket (A), and the secure canopy (D) with mounting screws (C) (Size:#8-32*0.3"L).
11. Place the glass shade (N) and cup (O) over the socket (M) and secure with the socket ring (P) with the wrench (Q) (provided).
12. Install the light bulb(s) in accordance with the fixture's specifications (**DO NOT EXCEED THE SPECIFIED WATTAGE!**) (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**).

Your installation is now complete. Return the power to the junction box and test the fixture.

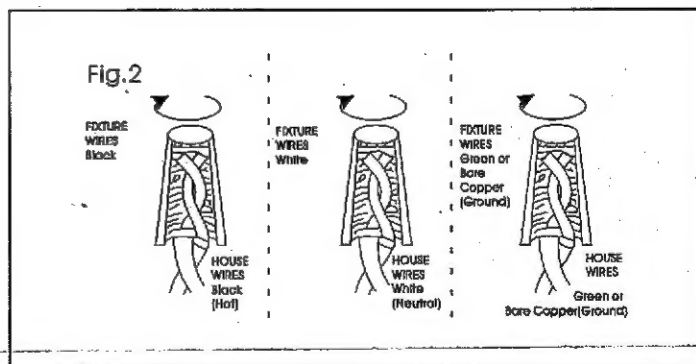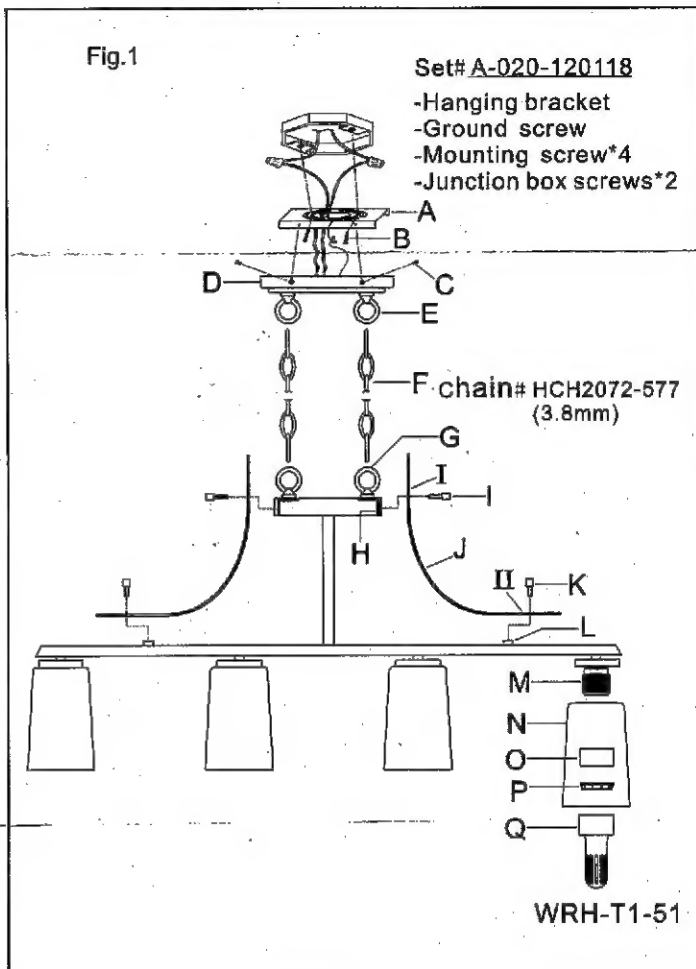

Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

